



Bobcat®

**New S750 and S770
Skid-Steer Loaders**





One Tough Animal™

Bobcat® S750 and S770 Skid-Steer Loaders

Specifications

| Loader | S750 | S770 |
|--|---|---------------------------|
| Loader Series | M-Series | M-Series |
| Rated Operating Capacity (ROC) | 3200 lb. (1452 kg) | 3350 lb. (1520 kg) |
| ROC with Counterweight (optional) | Counterweight kits are available to increase ROC. See dealer on available kits and ROC increases for your loader. | |
| Tipping Load | 6400 lb. (2903 kg) | 6700 lb. (3039 kg) |
| Height to Hinge Pin | 132 in. (3353 mm) | 132 in. (3353 mm) |
| Lift Arm Path | Vertical | Vertical |
| Size and Speed | | |
| Operating Weight | 8730 lb. (3960 kg) | 9175 lb. (4162 kg) |
| Bucket Width | 74 in. (1880 mm) | 74 in. (1880 mm) |
| Cab Height | 81.3 in. (2065 mm) | 81.3 in. (2065 mm) |
| Travel Speed - Low Range | 7.1 mph (11.4 km/hr.) | 7.1 mph (11.4 km/hr.) |
| Travel Speed - High Range | 12.3 mph (19.8 km/hr.) | 12.3 mph (19.8 km/hr.) |
| Engine | | |
| | Tier III Compliant | Tier III Compliant |
| Horsepower | 85 hp | 92 hp |
| Type | Turbo Diesel | Turbo Diesel |
| Fuel Tank Capacity | 27.2 gal (103.1 L) | 27.2 gal (103.1 L) |
| Horsepower Management | Included with SJC Option | Included with SJC Option |
| Uptime Protection | | |
| Axle Grease | Never | Never |
| Required Chain Adjustment | Never | Never |
| Standard Features | | |
| Axle Seal Protection | Dual Path Cooling System | |
| Back-up Alarm & Horn | Fingertip Auxiliary Hydraulics Control | |
| Bob-Tach™ Mounting System | Front and Rear Work Lights | |
| Bobcat Heavy Duty Tires | Machine Shutdown Protection | |
| Bobcat Interlock Control System (BICST™) | Pressure Release Hydraulic Quick Couplers | |
| Bobcat SmartFAN™ | ROPS/FOPS Approved Cab Structure | |
| Bobcat Standard Controls: | | |
| Foot Pedals/ Steering Levers | | |
| Options/Accessories | | |
| Air Ride Seat | Deluxe Instrumentation (includes Keyless Start) | |
| Attachment Control Kit | Hydraulic Bucket Positioning | |
| Bobcat Heavy Duty | Mechanical Suspension Seat | |
| Bobcat Severe Duty | Power Bob-Tach™ | |
| Bobcat Super Float | Radio | |
| Cab with Heat | Radio Remote Control (SJC Required) | |
| Cab with Heat & Air Conditioning | Ride Control | |
| Control Options: | Sound Reduction Package | |
| Advance Control System (ACS) | 2-Speed | |
| Selectable Joystick Control (SJC) | | |
| Features for Attachments | | |
| Hydraulic System Pressure | 3500 psi | 3500 psi |
| Hydraulic Standard Flow | 23 gpm (87.1 L/min.) | 23 gpm (87.1 L/min.) |
| Hydraulic High Flow (optional) | 36.5 gpm (138.2 L/min.) | 36.5 gpm (138.2 L/min.) |
| Speed Management | Included with SJC Option | Included with SJC Option |

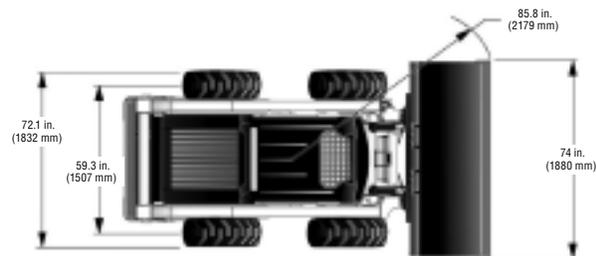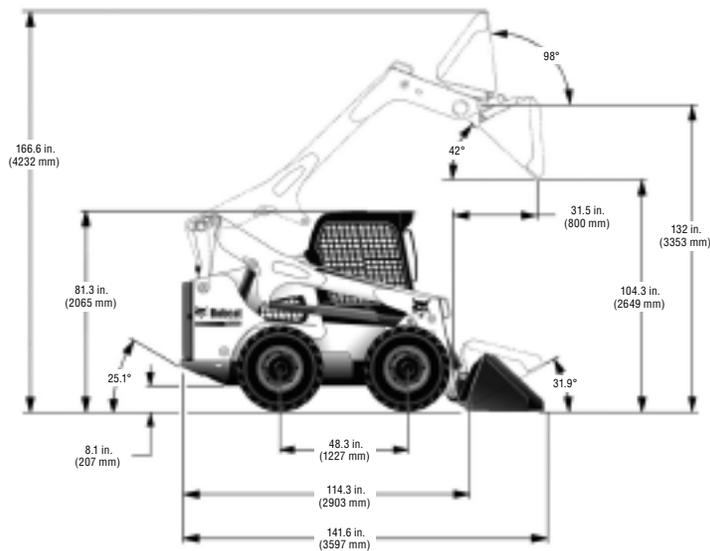

We've raised the bar. Again.

More lifting power. Higher reach. Improved hydraulic flow. It all adds up to greater on-the-job performance and productivity with the maneuverable new 700 platform from Bobcat – unquestionably one of the most versatile skid-steer loaders you can buy.

The new S750 and S770 models deliver an incredible 11 feet of vertical lift, 23 gpm standard hydraulic flow and 36.5 gpm high flow with 3,500 psi hydraulic relief pressure, giving you the power and reach you need for the most demanding tasks.

Both feature the latest Bobcat Comfort Cab improvements, including cab-forward design, better visibility, a cleaner, quieter pressurized working environment, and optional radio and air suspension seat.

Serviceability improvements include an easier-to-clean cooling system, more efficient hydraulics with an easy-to-read level indicator, and end-greased pins at vital locations. Uptime protection improvements include a redesigned rear bumper and integrated quick couplers to keep you rolling with minimum maintenance time.

NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

The Bobcat Attachments Advantage: Bobcat attachments are engineered and manufactured to fit Bobcat loaders for optimum job performance, dependability and durability.

Bobcat Attachments for these models:

- Angle Broom*
- Auger
- Backhoe
- Box Blade
- Brushcat™
- Rotary Cutter
- Brush Saw
- Buckets
- Bucket Adapter
- Chipper*
- Combination Bucket
- Concrete Pump*
- Digger
- Dozer
- Drop Hammer
- Dumping Hopper
- Flail Cutter
- Forks, Utility
- Forestry Cutter
- Grader
- Grapple, Industrial
- Grapple, Root
- Grapple, Utility
- Hydraulic Breaker
- Landplane
- Landscape Rake
- Mower
- Packer Wheel
- Pallet Fork
- Pallet Fork, Hydraulic
- Planer*
- Rear Stabilizer
- Scarifier
- Scraper
- Seeder
- Silt Fence Installer
- Snow Blade
- Snow Pusher
- Snow V-Blade
- Snowblower*
- Sod Layer
- Soil Conditioner
- Spreader
- Steel Tracks
- Stump Grinder*
- Sweeper
- Three-Point
- Hitch Adapter
- Tiller
- Tree Spade
- Trencher
- Utility Frame
- Vibratory Roller
- Water Kit
- Whisker Broom
- Wheel Saw
- X-Change Frame

*Attachment Control Kit required.



Printed on 10% recycled paper



Bobcat®

Visit bobcat.com/anyjob for more information

Bobcat Company • P.O. Box 6000 • West Fargo, ND 58078